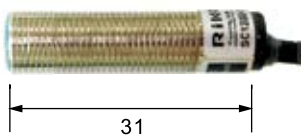
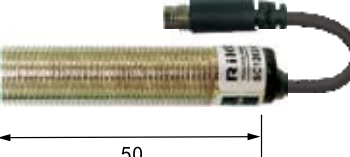

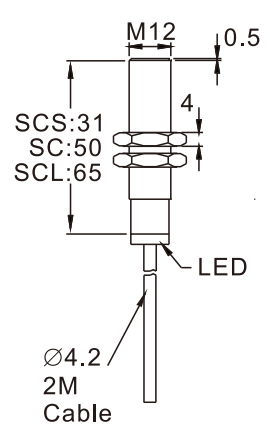
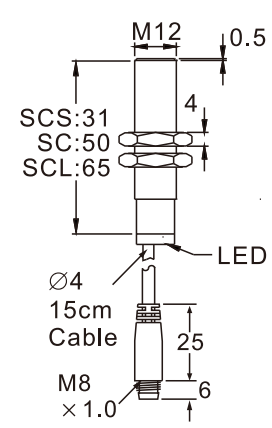
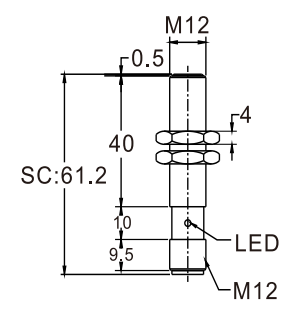






Tubular Inductive Proximity Sensor

M12

◆Specifications / 規格表 :

<p>SCS1202-□</p>  <p>31</p> <p>SC1202-□D</p>  <p>50</p> <p>SC1202-□M1</p>  <p>57</p> <p><unit:mm></p>	 <p>SCS:31 SC:50 SCL:65</p> <p>M12 0.5</p> <p>4</p> <p>LED</p> <p>Ø4.2 2M Cable</p>	 <p>SCS:31 SC:50 SCL:65</p> <p>M12 0.5</p> <p>4</p> <p>LED</p> <p>Ø4 15cm Cable</p> <p>M8 × 1.0</p> <p>25</p> <p>6</p>	 <p>M12</p> <p>0.5</p> <p>40</p> <p>4</p> <p>LED</p> <p>SC:61.2</p> <p>10</p> <p>9.5</p>																												
	<p>-□D</p>  <p>OUT 4</p> <p>1 + 3 -</p>	<p>-□M1</p>  <p>OUT 4</p> <p>1 + 2 - 3</p>  <p>21</p> <p>18.2</p>	<p>-□A</p>  <p>AC 3</p> <p>1 AC</p>																												
	<p>Output method / 輸出模式</p> <table border="1"> <tr> <td>NPN N.O.</td> <td>SC□1202-N</td> <td>SC□1202-ND</td> <td>SC1202-NM1</td> </tr> <tr> <td>NPN N.C.</td> <td>SC□1202-N2</td> <td>SC□1202-N2D</td> <td>SC1202-N2M1</td> </tr> <tr> <td>PNP N.O.</td> <td>SC□1202-P</td> <td>SC□1202-PD</td> <td>SC1202-PM1</td> </tr> <tr> <td>PNP N.C.</td> <td>SC□1202-P2</td> <td>SC□1202-P2D</td> <td>SC1202-P2M1</td> </tr> <tr> <td>NPN N.O./N.C. PNP N.O./N.C.</td> <td>SC1202-KP2</td> <td align="center">-</td> <td align="center">-</td> </tr> <tr> <td>SCR N.O.</td> <td>SC1202-A</td> <td align="center">-</td> <td align="center">-</td> </tr> <tr> <td>SCR N.C.</td> <td>SC1202-A2</td> <td align="center">-</td> <td align="center">-</td> </tr> </table>	NPN N.O.	SC□1202-N	SC□1202-ND	SC1202-NM1	NPN N.C.	SC□1202-N2	SC□1202-N2D	SC1202-N2M1	PNP N.O.	SC□1202-P	SC□1202-PD	SC1202-PM1	PNP N.C.	SC□1202-P2	SC□1202-P2D	SC1202-P2M1	NPN N.O./N.C. PNP N.O./N.C.	SC1202-KP2	-	-	SCR N.O.	SC1202-A	-	-	SCR N.C.	SC1202-A2	-	-	<p>Sensing type / 檢出方式</p> <p align="center">Shielded / 隔離型</p>	<p>Description / 外型</p> <p align="center">Standard / 標準M12</p>
NPN N.O.	SC□1202-N	SC□1202-ND	SC1202-NM1																												
NPN N.C.	SC□1202-N2	SC□1202-N2D	SC1202-N2M1																												
PNP N.O.	SC□1202-P	SC□1202-PD	SC1202-PM1																												
PNP N.C.	SC□1202-P2	SC□1202-P2D	SC1202-P2M1																												
NPN N.O./N.C. PNP N.O./N.C.	SC1202-KP2	-	-																												
SCR N.O.	SC1202-A	-	-																												
SCR N.C.	SC1202-A2	-	-																												
<p>Sensing distance / 檢出距離</p> <p align="center">2 mm</p>	<p>Secure sensing distance / 建議距離</p> <p align="center">0 to 1.6 mm</p>	<p>Hysteresis / 遲滯</p> <p align="center">≤ 10 % of sensing distance</p>	<p>Response time / 反應時間</p> <p align="center">DC Type 1 ms Max. or AC Type 50ms</p>																												
<p>Operating voltage / 工作電壓</p> <p align="center">DC 12 ~ 24V or AC90 ~ 260 V</p>	<p>Current consumption / 消耗電流</p> <p align="center">DC : ≤ 8 mA no-load or AC : 2 mA Max</p>	<p>Load current / 負載電流</p> <p align="center">DC : 100 mA Max at DC 24V or AC : 5 ~ 300 mA Max</p>	<p>Leakage current / 漏電流</p> <p align="center">≤ 1.1 mA no-load</p>																												
<p>Residual voltage / 殘餘電壓</p> <p align="center">≤ DC 1.5V</p>	<p>Insulation resistance / 隔離阻抗</p> <p align="center">20MΩ min. (DC500V)</p>	<p>Voltage withstandability / 絕緣耐壓</p> <p align="center">AC1000V 60Hz for 60Sec.</p>	<p>Operating temperature / 工作溫度</p> <p align="center">-20°C ~ + 60°C</p>																												
<p>Protection degree / 防水等級</p> <p align="center">IP 66</p>	<p>Wiring method / 出線方式</p> <p>N/P : Ø4.2x 2M / 3-wires KP2 : Ø4.2x2M / 4-wires AC : Ø4.2x2M / 2-wires</p>	<p>M8 pigtailed type / M8 接頭15cm電線式</p>	<p>M12 plug-in connector type / M12 接頭</p>																												

AUTEK Ltda.

www.autek.cl 02-5113684 ventas@autek.cl

RIKO